
Milvent

SERIES

Snap Vent Parts

÷-








->Maintain high airflow in large battery main pack or outdoor Enclosure.

->Equalize pressure and reduce condensation by allowing air to flow freely into and out of sealed large enclosures.

->Simple and flat low profile design meets any type of enclosures.

->IP68 protection class(2meters/60min.) and -40° C to +125° C operating temp.range.Best to use under the tough environment.

->Installing on the side/top face of enclosures is effective for outdoor use.

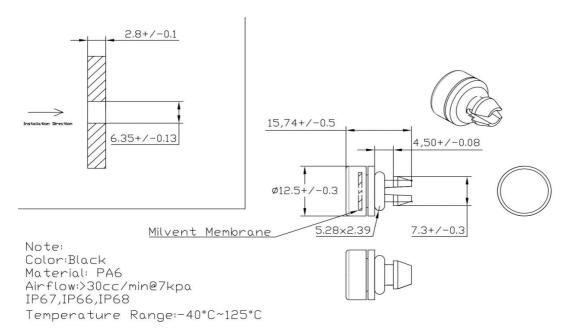

Technical Data

Typical airflow	>30ml/H@7kpa				
WEP	>300mbar@1min				
Enviromental performance	IEC529,2nd(Protection class): .IP67,IP68,IP69K IEC60068-2-1,2,14(Heat resistance):-40°C~+125°C IEC600-2-78(Humidity testing):85°.85%humidity-1000 hours IEC62108.10.8.9(Solor industry testing):Humidity freeze-High temperature,Hail impact test. UL94V0				

Part no./Components

Part no.	Material					Sales	
	① Housing	②Membrane	30-ring	<pre>④Color</pre>			unit
MIV-SNAP-6.35	PA6	Micro Membrane	Silicone	Black			1000
MIV-SNAP-6.35S				Light Grey			