


MIL SERIES

Actual Picture




Actual Application

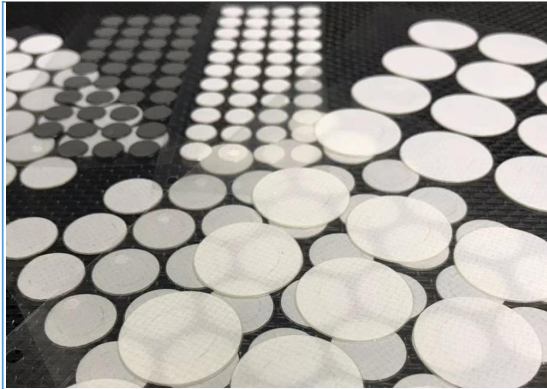

Performance:

- >Block ingress of wide range of contaminants,from rain and insects to dirt,dust,sand and other particulates,
- >can diffuse water vapor molecules the microporous membrane
- >IP 68 protection class(2 meters/60 min.) and -40° C to +125° C
- >operating temp.range.Best to use under the tough environment.
- >Simple and flat design meets any type of enclosures.
- >Installing on the side face of enclosures is effective for outdoor use.

Dimensions

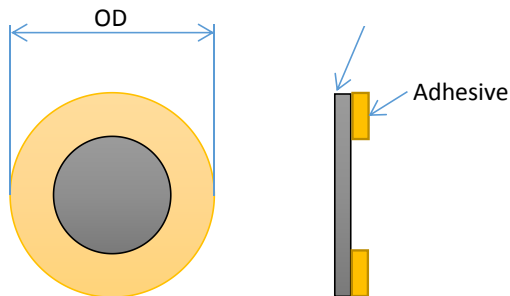

Three Color and code

White

Black

Dark Grey

B

DG

Part No.	Ourter diameter Φ	Filter Effective Diameter Φ	Thickness	Enviromental performance
MIV-AVD-3-1	3	1	0.25	<p>IP66.IP67.IP68 (Immersion:2meters/60min.) -40°C~+125°C 85%.85%humidity-1000 hours Humidity freeze-High temperature,Hail impact test.</p> <p>Airflow:>airflow:300ml/min/cm²@70mb ar</p> <p>Water entry point: > 0,5 bar Good Seal for ABS, ABS/PC, PA6 material. Meet Rohs,Reach, Typical is White Color.</p>
MIV-AVD-5-2	5	2	0.25	
MIV-AVD-6-3	6	3	0.25	
MIV-AVD-7-3	7	3	0.25	
MIL-AVD--7.6-3.3	7.6	3.3	0.25	
MIL-AVD--8-4	8	4	0.25	
MIL-AVD-10.2-5.5	10.2	5.5	0.25	
MIL-AVD-11-7-DG	11	7	0.25	
MIL-AVD-14-8.0	14	8	0.25	
MIL-AVD-12-8.0	12	8	0.25	
MIL-AVD-16-8.0	16	8	0.25	
MIL-AVD-19.1-8.9	19.1	8.9	0.25	
MIL-AVD-21.5-12.5	21.5	12.5	0.25	

FOR other TYPES please check with us.

Other sizes please check with us.We can OEM any sizes for you rapidly within 3days.

www.milvent.com; milvent@milvent.com

+8618218369198